


Line of ultra-thin linear lamps with uniform light emission, designed to obtain an extremely clean result.



Technical Specs

INPUT VOLTAGE	24V DC
DRIVER	AC DC 24V DC OUTPUT (class 2 Power Unit)
DIMMABILITY	YES by all existing systems (0-10V, Dali, DMX, ELV/MLV, Lutron Ecosystem, ... )
POWER CONSUMPTION	Standard bright 4.5 W per linear ft (14 W per linear meter) High bright 9 W per linear ft (28 W per linear meter)
LUMEN DELIVERED	Standard bright 290 lm per linear ft (890 lm per linear meter) High bright 580 lm per linear ft (1780 lm per linear meter)
IP GRADE	IP 40 - suitable for Dry Location    (IP 54 - Damp Location under request)
CRI	> 95
WEIGHT	5.7 lbs/sq. ft (25 Kg/sq. mt)
LIFE TIME	70.000 hrs
WARRANTY	3 Years (36 months)
CERTIFICATIONS	<div><div><div>CE</div><div>EAC</div><div>cULus</div><div>JAB T24</div></div><div><ul style="list-style-type: none"><li>• Ceiling surface Mounted</li><li>• Ceiling recessed Type IC Inherently protected</li><li>• Wall surface Mounted</li><li>• Storage Area of a Clothes Closet</li></ul></div></div>

Size

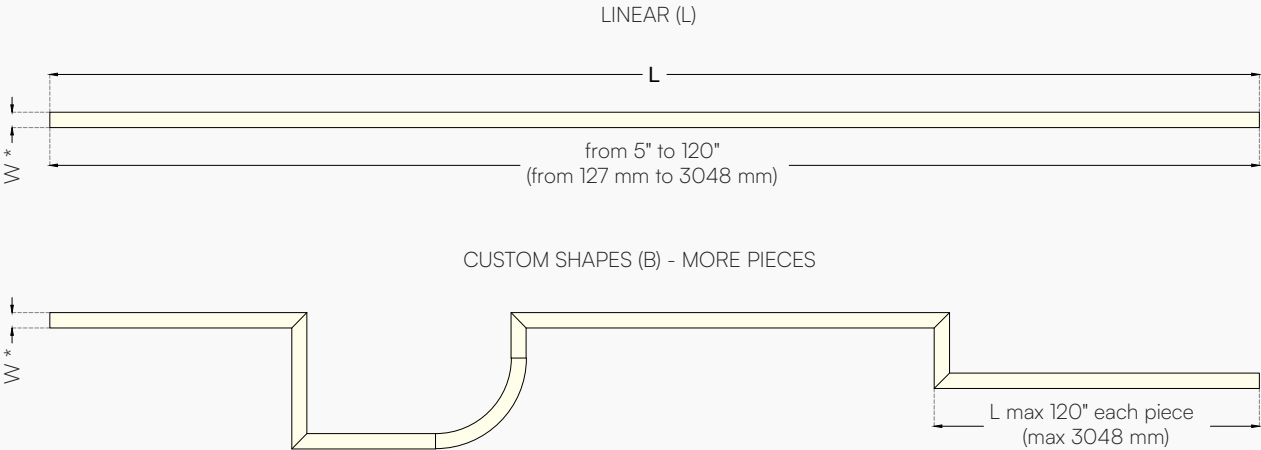


\* Standard Width 0.6" - 1" - 1.2" - 1.4" - 1.6" - 2" - 3" - 4" - 6" - 8"

\* Standard Width 15.24 - 25.4 - 30.48 - 35.56 - 40.64 - 50.8 - 76.2 - 101.6 - 152.4 - 203.2 mm


\*Custom Width from 0.6" to 8"

\* Custom Width from 15.24 mm to 203.2 mm

SECTION OF FLUSH (no mounting system)

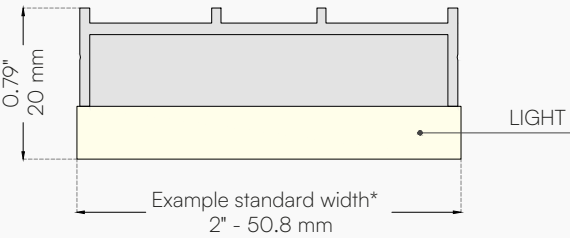

TYPE OF MITERED CORNES:

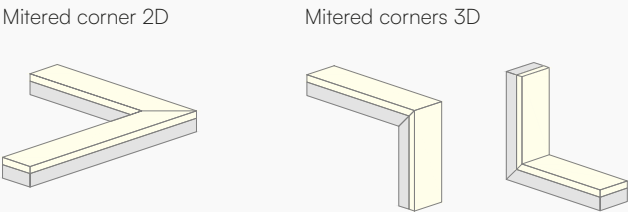

Name	Use *	Size *	Kelvin **	Brightness	Dimming	Mounting system *
FLUSH	Ceiling Wall Floor Cabinet Mirror	L - linear (Width x Length)  B - bespoke (Need CAD drawing)	<div><div>2000 K</div><div>2700 K</div><div>3000 K</div><div>3500 K</div><div>4100 K</div><div>5000 K</div><div>Dim to Warm **</div><div>Tun W (18K-32K / 3 wires)</div><div>Tun W (24K-41K / 3 wires)</div><div>RGB</div></div>	Standard bright (4.5 W/ft - 14 W/mt)  High bright (9 W/ft - 28 W/mt)	No dimming 0-10V Dali DMX ELV/MLV Lutron Ecosystem	No mounting system Magnetic Steel Cords (Shy suspended) Uplight (Laying on existing)

\* Backlight reserves the right to modify and advise in case the dimension of the panel doesn't allow to use the system selected.

\*\* Other Kelvin, Dim to Warm (19K-30K / 2 wires), RGBW and RGBTW under request.

Cable options

A - end feed    B - backfeed    C - side feed

BKL < 42W    1 cable  
BKL > 42W    2 cables

Cables from BKL ~ 20" (500 mm) + Extension cables ~ 40" (1000 mm)  
Custom length of cables under request. BKL \_\_\_\_\_ + Exten \_\_\_\_\_

Other options

IP: IP40 (Dry location) or IP54 (Damp location)

FINISH: Standard RAL 9003  
(Custom RAL \_\_\_\_\_ under request)


PRINTING: Printing on Backlight surface using a new UV technology  
(High Resolution file needed)

FACE WORKING: Lowering of the surface for your framing accomodation


NOTE: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Mounting system


MAGNETIC SURFACE

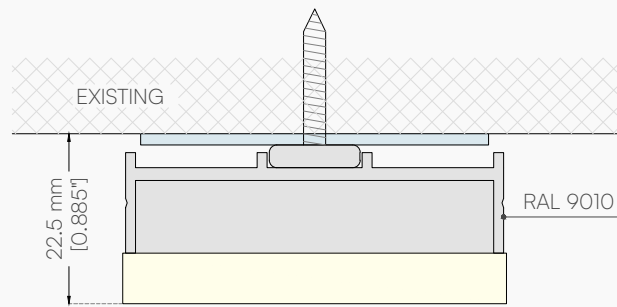


MAGNETIC RECESSED

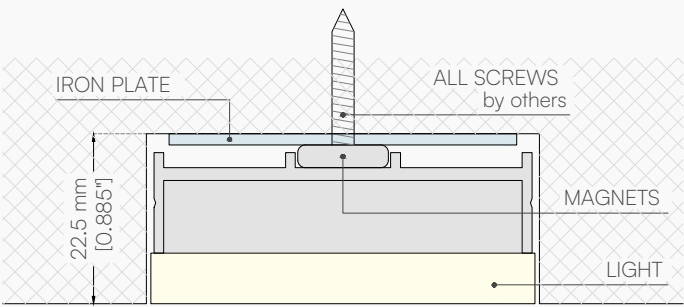

STEEL CORDS (Shy suspended)

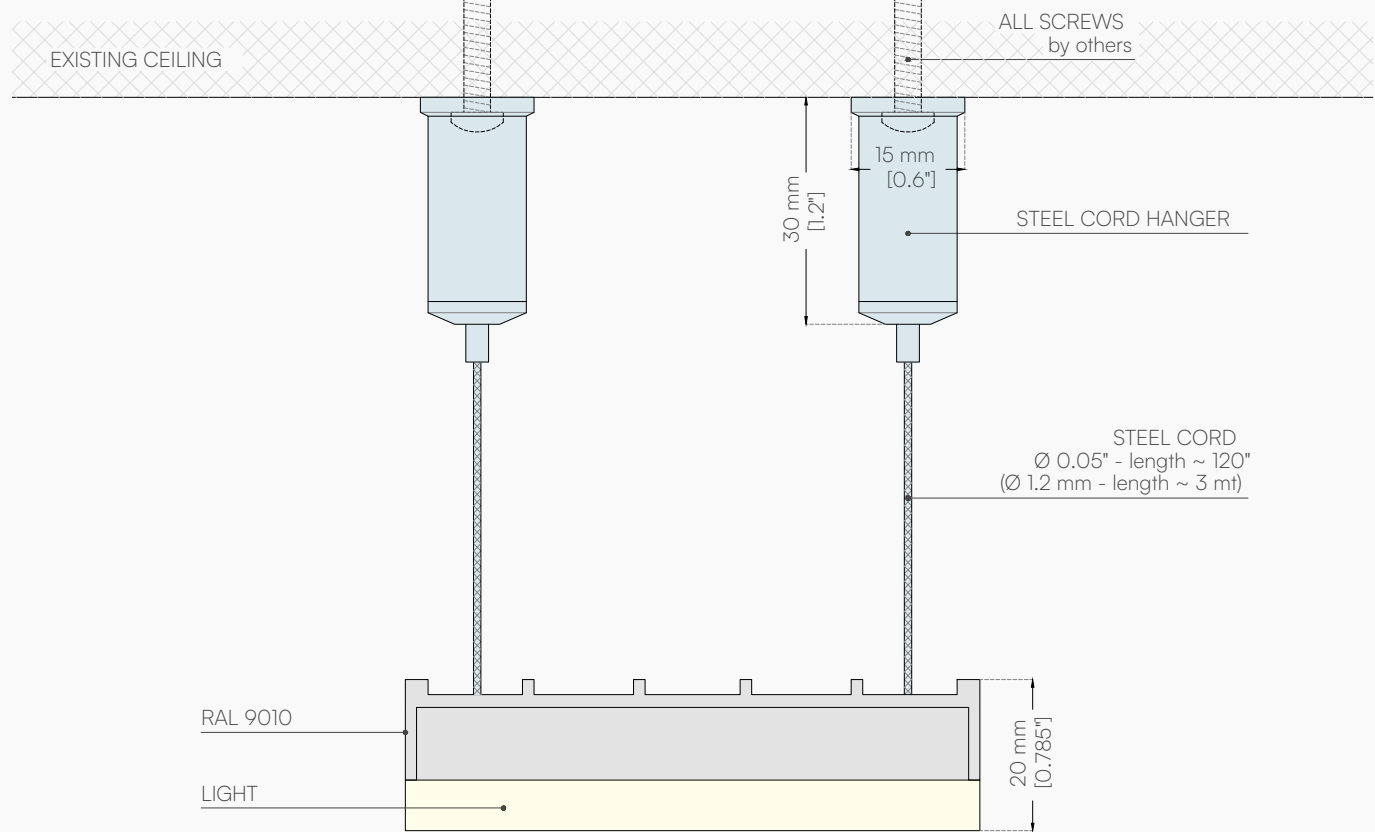



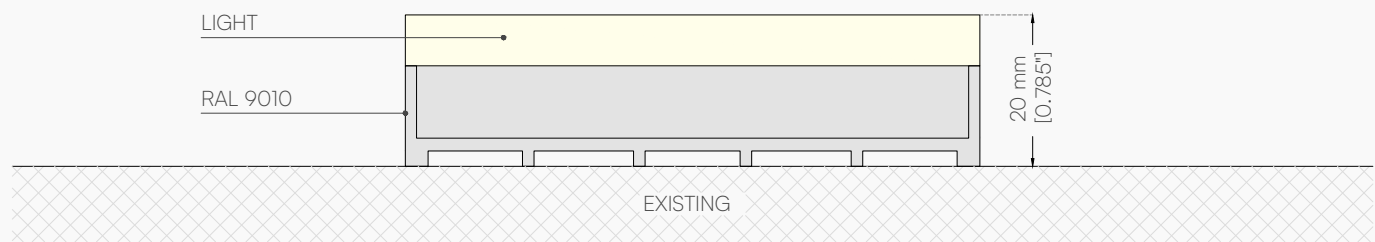





UPLIGHT (Laying on existing - no mounting system)



Project: \_\_\_\_\_

Date: \_\_\_\_\_

Rev: \_\_\_\_\_

Name	Use *	Size *	Kelvin **	Brightness	Dimming	Mounting system *
FLUSH	Ceiling Wall Floor Cabinet Mirror	L - linear (Width x Length)  B - bespoke (Need CAD drawing)	 2000 K  2700 K  3000 K  3500 K  4100 K  5000 K  Dim to Warm **  Tun W (18K-32K / 3 wires)  Tun W (24K-41K / 3 wires)  RGB	Standard bright (4.5 W/ft - 14 W/mt)  High bright (9 W/ft - 28 W/mt)	No dimming 0-10V  Dali DMX ELV/MLV Lutron Ecosystem	No mounting system Magnetic  Steel Cords (Shy suspended) Uplight (Laying on existing)

\* Backlight reserves the right to modify and advise in case the dimension of the panel doesn't allow to use the system selected.

\*\* Other Kelvin, Dim to Warm (19K-30K / 2 wires), RGBW and RGBTW under request.


[illegible]

## Cable options

A - end feed    B - backfeed    C - side feed

BKL < 42W 1 cable

BKI > 42W 2 cables

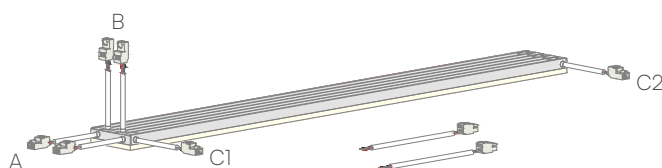

Cables from BKL ~ 20" (500 mm) + Extension cables ~ 40" (1000 mm)

Custom length of cables under request. BKL + Exten

## Other options

IP: IP40 (Dry location) or IP54 (Damp location)

FINISH: Standard RAL 9003

(Custom RAL \_\_\_\_\_ under request)

PRINTING: Printing on Backlight surface using a new UV technology  
(High Resolution file needed)

**FACE WORKING:** Lowering of the surface for your framing accomodation

NOTE: \_\_\_\_\_

---